


ELITE GRAPHIC WALL fabric display

ELITE GRAPHIC WALL is constructed of aluminum extrusion and features SEG press fit fabric graphics for hassle free set up. Heavy duty aluminum feet ensure maximum stability. Graphics are printed on premium fabric for vibrant colors. The entire unit disassembles and packs flat in a single rotomolded case for unparalleled protection.

MODEL #: EGW-108



Details

- 1.5" Low-profile aluminum extrusion frame
- Single or double-sided SEG press fit dye-sublimated fabric graphics
- Easy assembly
- Packs in a single rotomolded flat transport case
- Limited Lifetime Warranty
- Made in the USA


Includes

- 10' x 8' Elite Frame
- Elite Stabilizer Feet
- SEG Front Fabric Graphic
- Elite Tool Kit
- Rotomolded Case

Dimensions

Assembled unit:
120"w x 95.25"h x 17.5"d
2413mm x 3048mm x 444mm
55 lbs / 25 kgS

Graphic area:
119.5"w x 94.5"h
3035mm x 2400mm

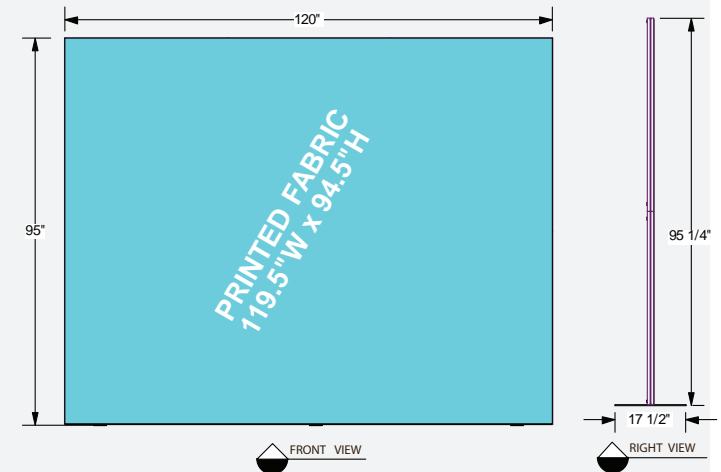

Additional information















Set-Up Time: 45-50min
Lead Time: 10 Days
Warranty: Limited Lifetime Warranty

Shipping




Packs in (1) L-8R1851-02 case
Shipping dimensions:
51"h x 18"w x 4.5"d
1295mm x 457mm x 114mm
85 lbs / 38.6 kgS

EGW-108 PACKAGE CONTENTS

Profile	Label	#	Description
	001	3	1/4" ALUMINIUM OVAL BASE PLATE 17.5" (444.5MM) x 3.15" (80MM)
	002	1	M1307 40" (1016MM) EXTRUSION W/ (1) 45° CUT & (1) HOLE FOR BASE PLATE
	003	1	M1307 40" (1016MM) EXTRUSION W/ (1) HOLE FOR BASE PLATE
	004	1	M1307 40" (1016MM) EXTRUSION W/ (1) 45° CUT & (1) HOLE FOR BASE PLATE
	005	2	M1307 47.5" (1206.5MM) EXTRUSION W/ (1) 45° CUT
	006	2	M1307 47.5" (1206.5MM) EXTRUSION W/ (1) 45° CUT
	007	1	M1307 40" (1016MM) EXTRUSION W/ (1) 45° CUT
	008	1	M1307 40" (1016MM) EXTRUSION
	009	1	M1307 40" (1016MM) EXTRUSION W/ (1) 45° CUT
	010	4	Z4400 45.9" (1165.9MM) EXTRUSION W/ (1) TENSION LOCK
	011	2	Z4400 30.2" (767MM) EXTRUSION W/ (1) TENSION LOCK
		4	Z966 90° CORNER INTERNAL CONNECTOR
		8	Z967 STRAIGHT INTERNAL CONNECTOR
		3	5/16-18 FLAT HEAD SCREW 2.25" LONG W/ WASHER & WING NUT
		1	119.5"W (3035MM) x 94.5"H (2400MM) SINGLE SIDED DYESUB GRAPHIC W/ SEG WELT ALL 4 SIDES

1.

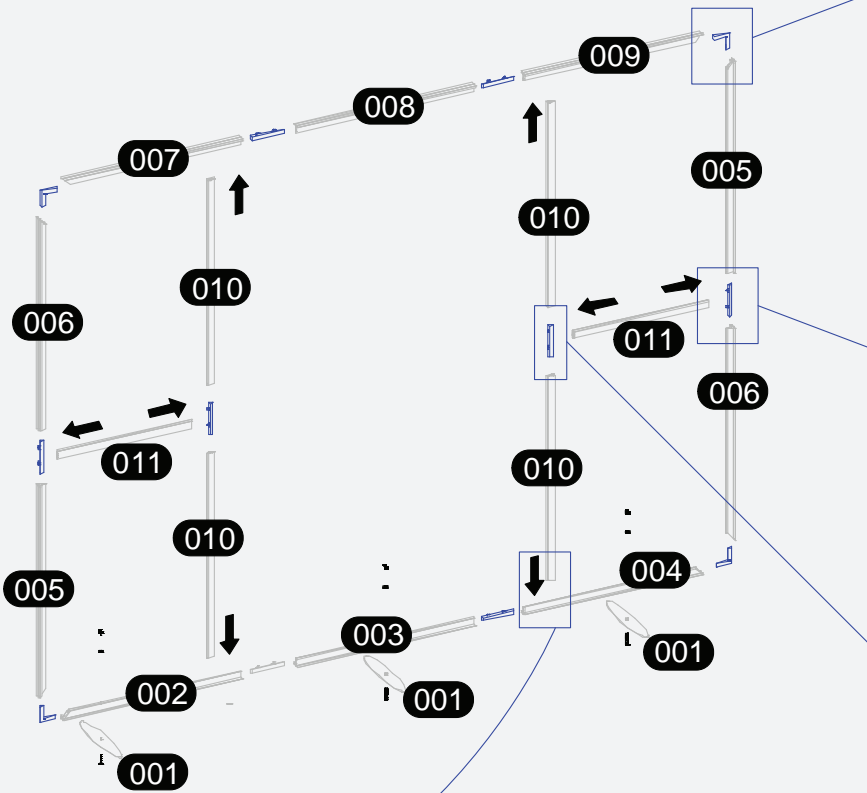

Connect frame extrusions together, as shown, using Torx tool (included). Do not overtighten.

NOTE: Remove corner connectors from extrusions before packing.

Connect frame spliced extrusions together, as shown, using Torx tool (included). Do not overtighten.

NOTE: Remove connectors from extrusions before packing

Connect frame spliced extrusions together, as shown, using Torx tool (included). Do not overtighten.

NOTE: Remove connectors from beams before packing

2.




Secure base plate to bottom horizontal extrusions with provided bolt and wing nut

3. GRAPHIC


Insert the silicon edge of the fabric into the groove of the extrusions.

Start on the corners, then centers and work your way to corners from center on both directions.

To pull fabric graphic out of extrusion groove, use pull tab on corner




Place tension lock into groove. Insert Torx 30 wrench and turn 1/2 turn.



1. Slide straight connector (Z967) into inner channel of extrusion.Turn screw enough to hold connector in place.
2. Take another extrusion and slide onto straight connector. Tigthen both screws to connect extrusions together.
3. Repeat above steps to connect all spliced extrusions together.
4. Slide corner connector (Z966) into both sides of horizontal extrusions.Turn each screw enough to hold connector in place.
6. Slide vertical extrusions onto corner connectors of top horizontal extrusion. Turn each screw enough to hold connector in place.
7. Finish frame assembly by sliding corner connectors of bottom horizontal extrusion into inner channel of vertical extrusions and tighten the screws to secure frame extrusions together.

4. LIGHT ASSEMBLY (Optional)





Slide light clip into the light. Then place the light into the groove and gently lower it down

5. WALL MOUNT (Optional)

Attach wall bracket to top extrusion groove with provided hammerhead screw. Locate position of wall bracket on extrusion (preferably by wood stud) by sliding the bracket on the extrusion and tighten it. Secure the frame to the wall with provided wood screw.



PACKING DIAGRAM





10x8



8x8



6x8



6x6



4x8



4x6



4x4



3x8



3x6



3x4



3x3