



ELITE GRAPHIC WALL fabric display

ELITE GRAPHIC WALL is constructed of aluminum extrusion and features SEG press fit fabric graphics for hassle free set up. Heavy duty aluminum feet ensure maximum stability. Graphics are printed on premium fabric for vibrant colors. The entire unit disassembles and packs flat in a single rotomolded case for unparalleled protection.


MODEL #: EGW-33







Details Includes • 1.5" Low-profile aluminum extrusion • 3' x 3' Elite Frame frame • Elite Stabilizer Feet • Single or double-sided SEG press fit • SEG Front Fabric Graphic dye-sublimated fabric graphics • Elite Tool Kit • Easy assembly · Rotomolded Case · Packs in a single rotomolded flat transport case Limited Lifetime Warranty Made in the USA Dimensions

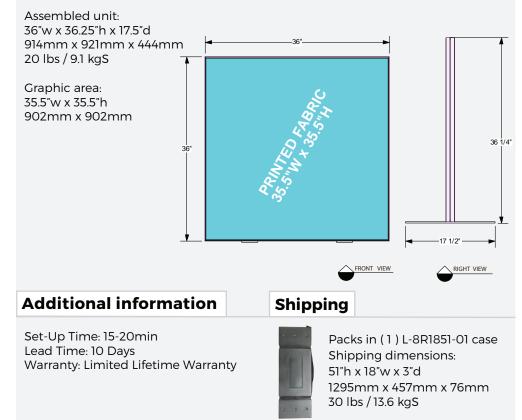


ASSEMBLY / INSTRUCTIONS

3ft.x 3ft



EGW-38 PACKAGE CONTENTS

Profile	Label	#	Description
2	001	2	1/4" ALUMINIUM OVAL BASE PLATE 17.5" (444.5MM) x 3.15" (80MM)
Ē	002	1	M1307 36" (914.4MM) EXTRUSIONS W/ (2) 45° CUTS & (2) HOLES FOR BASE PLATE
1	003	3	M1307 36" (914.4MM) EXTRUSIONS W/ (2) 45° CUTS
		4	Z966 90° CORNER INTERNAL CONNECTOR
Ť		2	5/16-18 FLAT HEAD SCREW 2.25" LONG W/ WASHER & WING NUT
		1	35.5"W (908MM) x 35.5"H (908MM) SINGLE SIDED DYESUB GRAPHIC W/ SEG WELT ALL 4 SIDES



Secure base plate to bottom horizontal extrusions with provided bolt and wing nut

4. LICHT ASSEMBLY (Optional)

Slide light clip into the light. Then place the light into the groove and gently lower it down


3. GRAPHIC

Insert the silicon edge of the fabric into the groove of the extrusions.



Start on the corners, then centers and work your way to corners from center on both directions.

To pull fabric graphic out of extrusion groove, use pull tab on corner



(preferably by wood stud) by sliding the bracket on the extrusion and tighten it. Secure the frame to the wall with provided wood screw.

