


FRONT VIEW


TOP VIEW

INSTRUCTIONS


1. Slide straight connector (Z967) into inner channel of extrusion. Turn screw enough to hold connector in place.
2. Take another extrusion and slide onto straight connector. Tighten both screws to connect extrusions together.
3. Repeat above steps to connect all spliced extrusions together.
4. Slide corner connector (Z966) into both sides of horizontal extrusions. Turn each screw enough to hold connector in place.
5. Slide vertical extrusions onto corner connectors of top horizontal extrusion. Turn each screw enough to hold connector in place.
6. Finish frame assembly by sliding corner connectors of bottom horizontal extrusion into inner channel of vertical extrusions and tighten the screws to secure frame extrusions together.

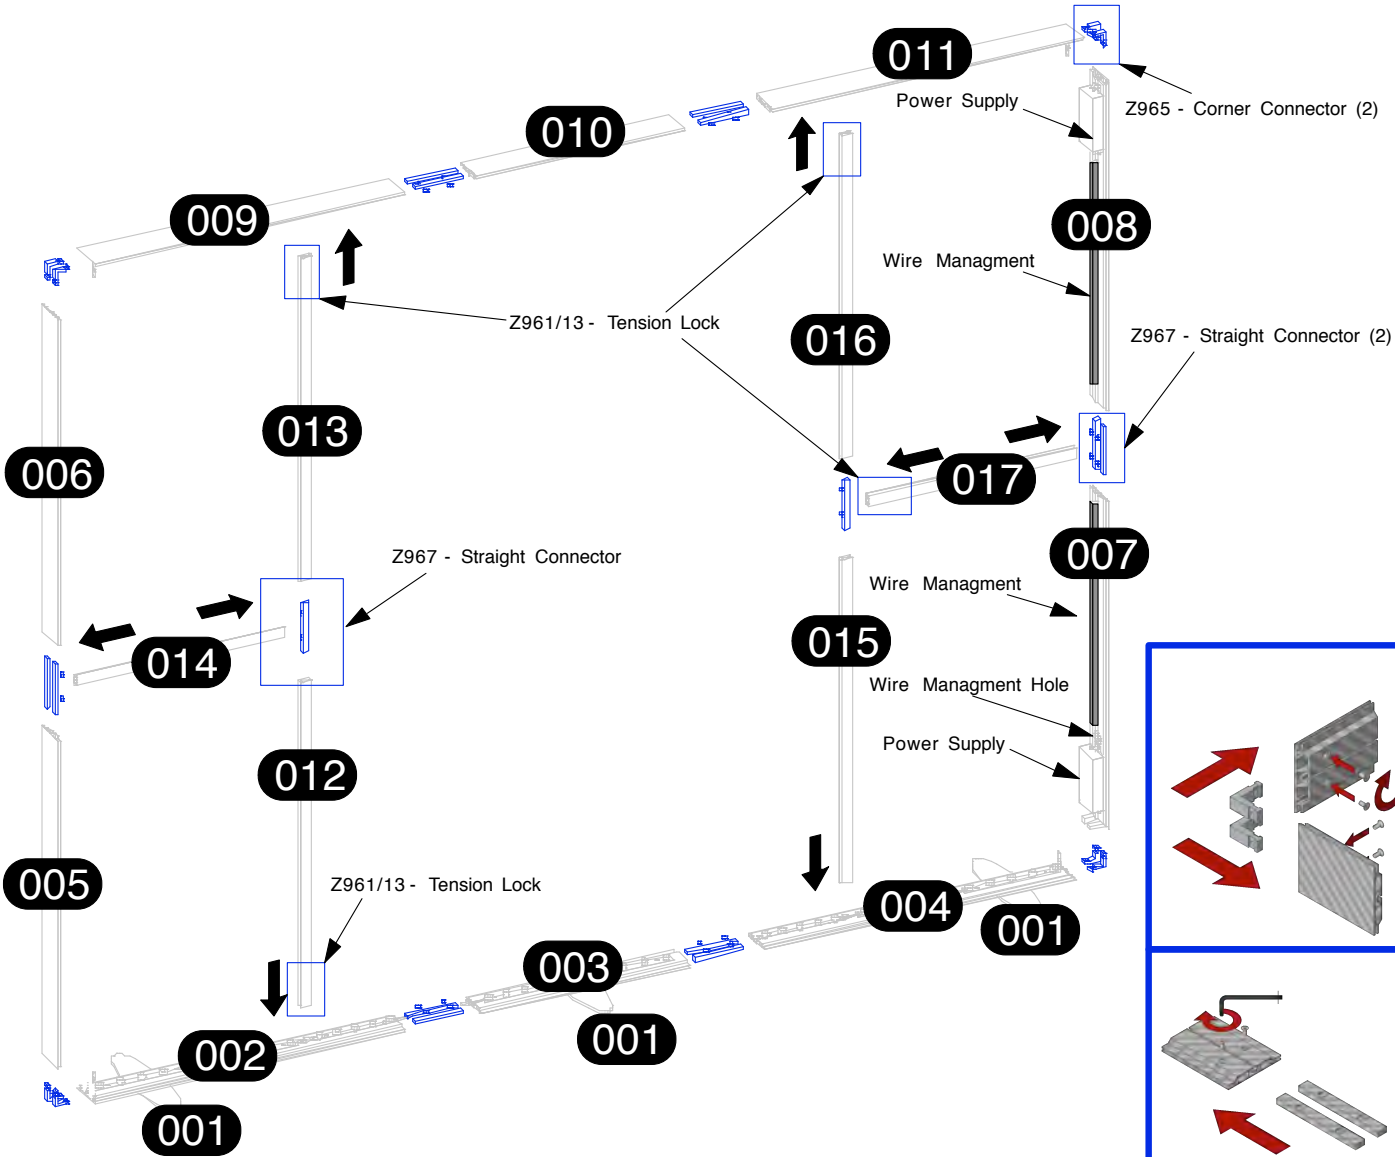


Profile	Label	#	Description
	001	3	1/4" ALUMINIUM OVAL BASE PLATE 17.5" (444.5MM) x 4.72" (120MM)
	002	1	M1901 45" (1143MM) EXTRUSION W/ (1) 45° CUT, (2) HOLES FOR BASE PLATE & LIGHTS
	003	1	M1901 30" (762MM) EXTRUSION W/ (2) HOLES FOR BASE PLATE & LIGHTS
	004	1	M1901 45" (1143MM) EXTRUSION W/ (1) 45° CUTS, (2) HOLES FOR BASE PLATE & LIGHTS
	005	1	M1901 47.5" (1206.5MM) EXTRUSION W/ (1) 45° CUT
	006	1	M1901 47.5" (1206.5MM) EXTRUSION W/ (1) 45° CUT
	007	1	M1901 47.5" (1206.5MM) EXTRUSION W/ (1) 45° CUT, PLASTIC EXTR. & POWER SUPPLY
	008	1	M1901 47.5" (1206.5MM) EXTRUSION W/ (1) 45° CUT, PLASTIC EXTR. & POWER SUPPLY
	009	1	M1901 45" (1143MM) EXTRUSION W/ (1) 45° CUT & LIGHTS
	010	1	M1901 30" (762MM) EXTRUSION W/ LIGHTS
	011	1	M1901 45" (1143MM) EXTRUSION W/ (1) 45° CUT & LIGHTS
	012	1	Z4400 46.87" (1190.5MM) EXTRUSION W/ (1) TENSION LOCK
	013	1	Z4400 46.87" (1190.5MM) EXTRUSION W/ (1) TENSION LOCK
	014	1	Z4400 30.22" (767.5MM) EXTRUSION W/ (2) TENSION LOCKS
	015	1	Z4400 46.87" (1190.5MM) EXTRUSION W/ (1) TENSION LOCK
	016	1	Z4400 46.87" (1190.5MM) EXTRUSION W/ (1) TENSION LOCK
	017	1	Z4400 30.22" (767.5MM) EXTRUSION W/ (2) TENSION LOCKS
		8	Z966 90° CORNER INTERNAL CONNECTOR
		14	Z967 STRAIGHT INTERNAL CONNECTOR
		4	5/16-18 FLAT HEAD SCREW 0.75" LONG FOR BASE PLATES
		2	120"W (3048MM) x 95"H (2413MM) SINGLE SIDED DYESUB GRAPHIC W/ SEG WELT ALL 4 SIDES



Loosen the screws on base plate but do not remove them. Then swivel base plates.




Tighten both screw firmly.

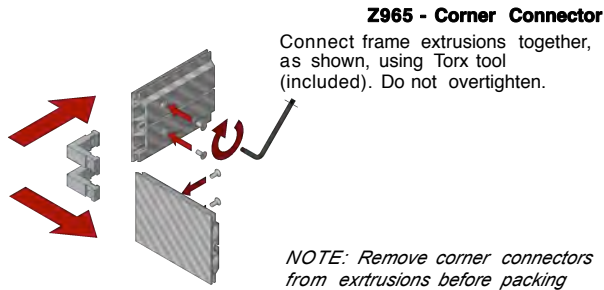


Connect frame extrusions together, as shown, using Torx tool (included). Do not overtighten.

NOTE: Remove corner connectors from extrusions before packing

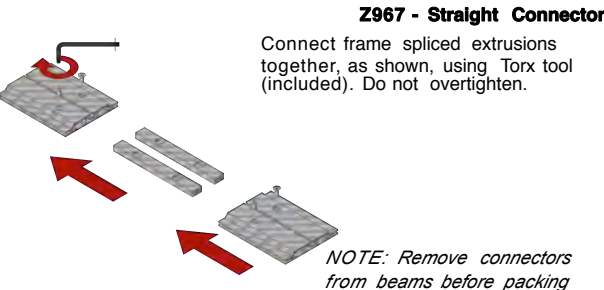

Connect frame spliced extrusions together, as shown, using Torx tool (included). Do not overtighten.

NOTE: Remove connectors from beams before packing

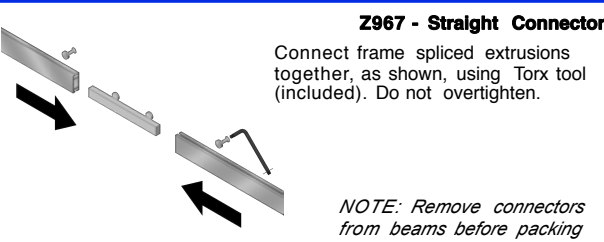


Connect frame spliced extrusions together, as shown, using Torx tool (included). Do not overtighten.

NOTE: Remove connectors from beams before packing



Place tension lock into groove. Insert Torx 30 wrench and turn 1/2 turn


GRAPHIC

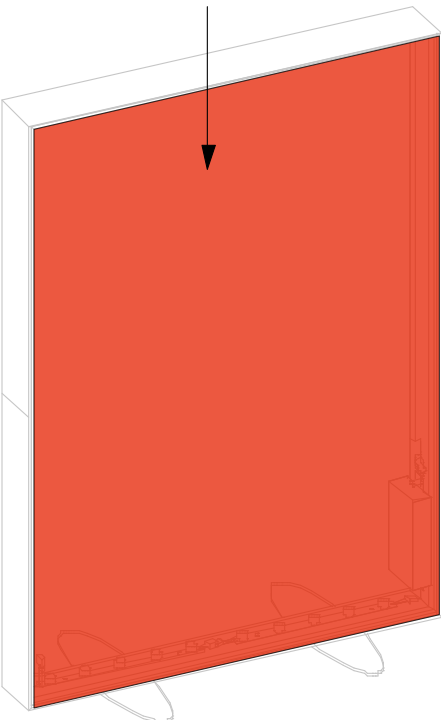

3D VIEW

GRAPHIC

Extrusion fabric groove

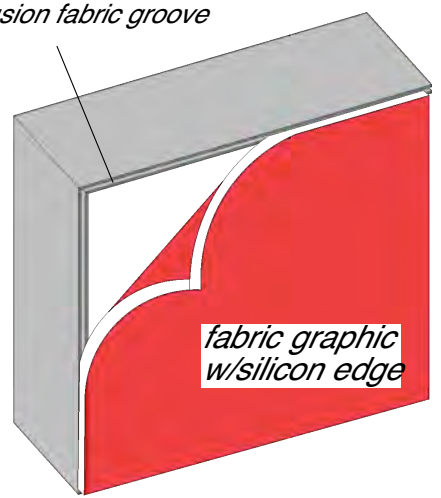


*fabric graphic
w/silicon edge*

Insert the silicon edge of the fabric into the groove of the extrusions.



Start on the corners, then centers and work your way to corners from center on both directions.

To pull fabric graphic out of extrusion groove use pull tab on corner.

PACKING DIAGRAM

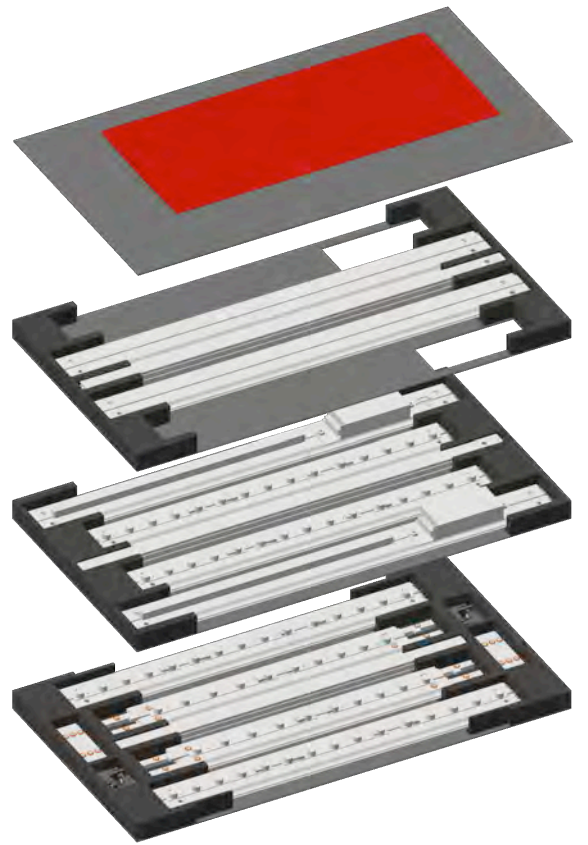

LIGHTS DETAILS

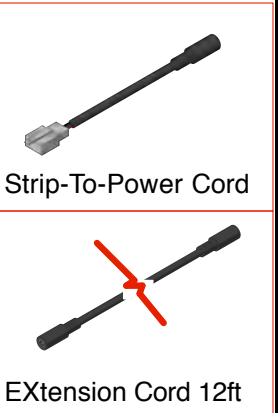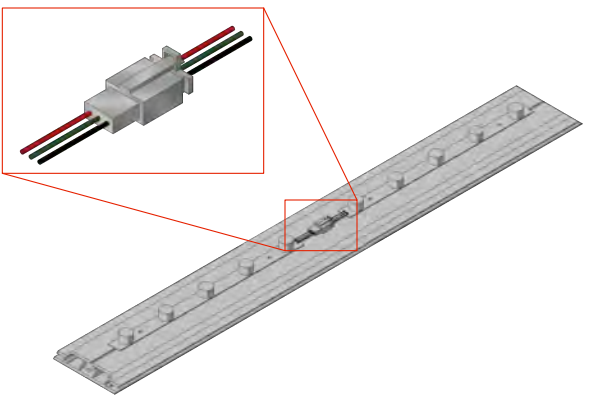


Lights come attached to extrusions. Ensure all lighting strips are connected. Once frame is assembled, connect strip-to-power cords to the end of top and bottom lights chain.

- For bottom lights connect strip-to-power cord to power supply directly.
- For top lights connect extension cord to strip-to-power cord and run with wire management extrusion then connect to power supply.


Run AC power cord out through grommet hole on vertical upright and connect to power outlet.


To remove or re-attach light strips use provided thumbscrews with plate.

WALL ASSEMBLY (OPTIONAL)

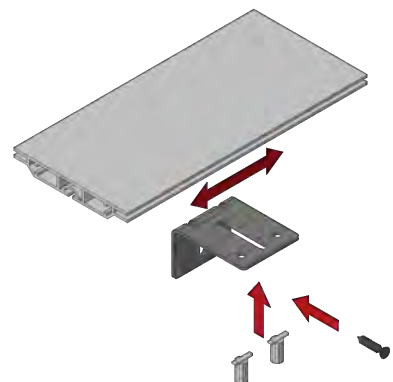


Attach wall bracket to top extrusion groove with provided hammerhead screws. Locate position of wall bracket on extrusion (preferably by wood stud) by sliding the bracket on the extrusion and tighten it. Secure the frame to the wall with provided wood screw.

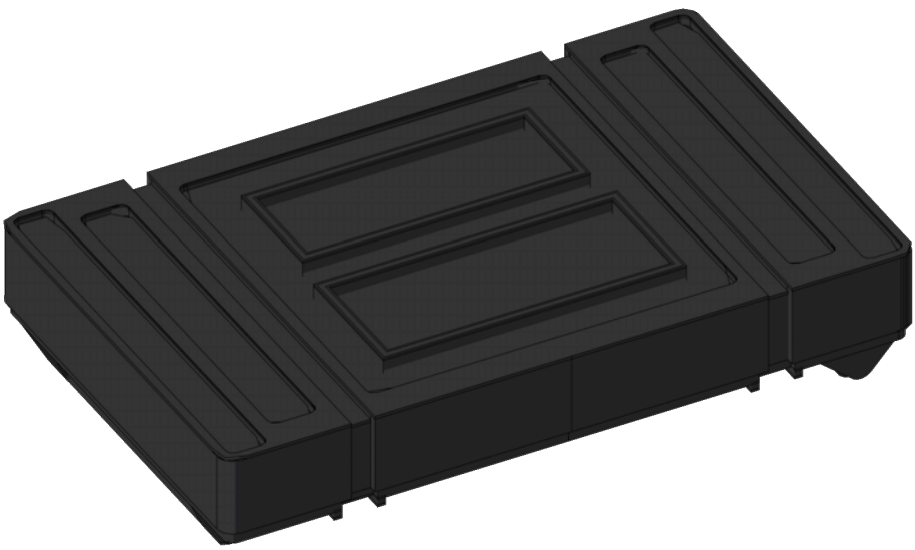

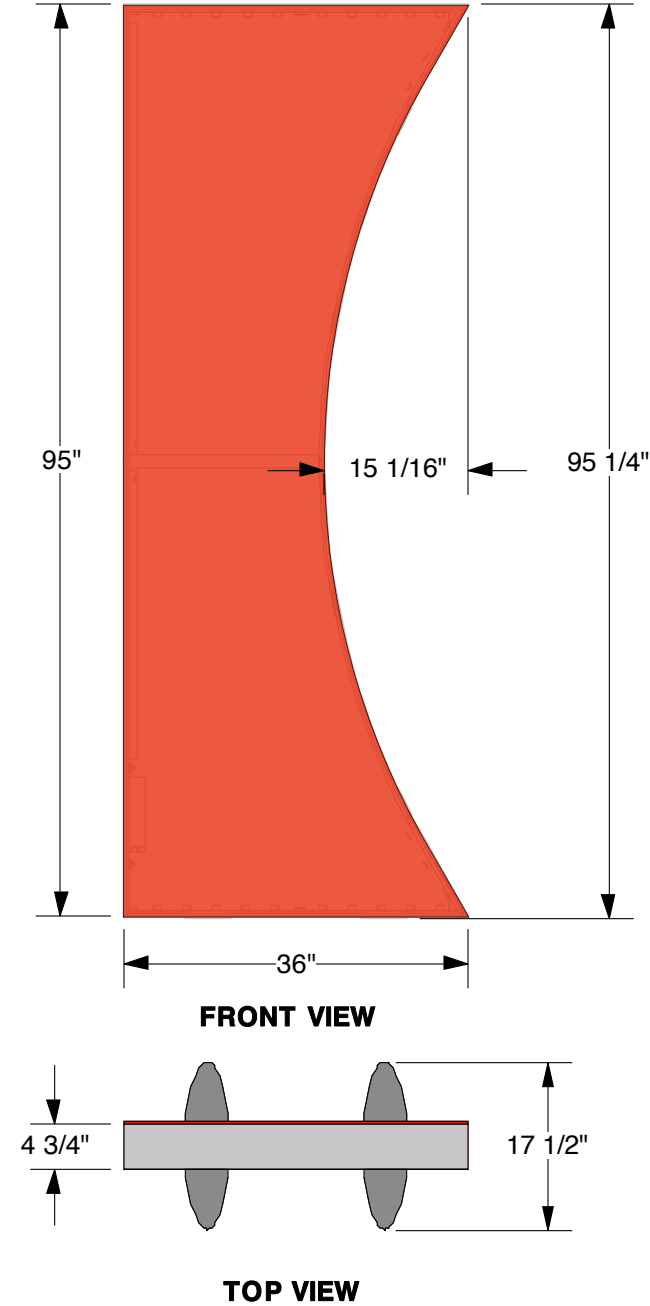

INSTRUCTIONS

- 1. Slide straight connector (Z967 & Z967-05) into inner channel of extrusion. Turn screw enough to hold connector in place.
- 2. Take another extrusion and slide onto straight connector. Tighten both screws to connect extrusions together.
- 3. Repeat above steps to connect all spliced extrusions together.
- 4. Slide corner connector (Z966 & Z964) into both sides of horizontal extrusions. Turn each screw enough to hold connector in place.
- 5. Slide vertical extrusions onto corner connectors of top horizontal extrusion. Turn each screw enough to hold connector in place.
- 6. Finish frame assembly by sliding corner connectors of bottom horizontal extrusion into inner channel of vertical extrusions and tighten the screws to secure frame extrusions together.

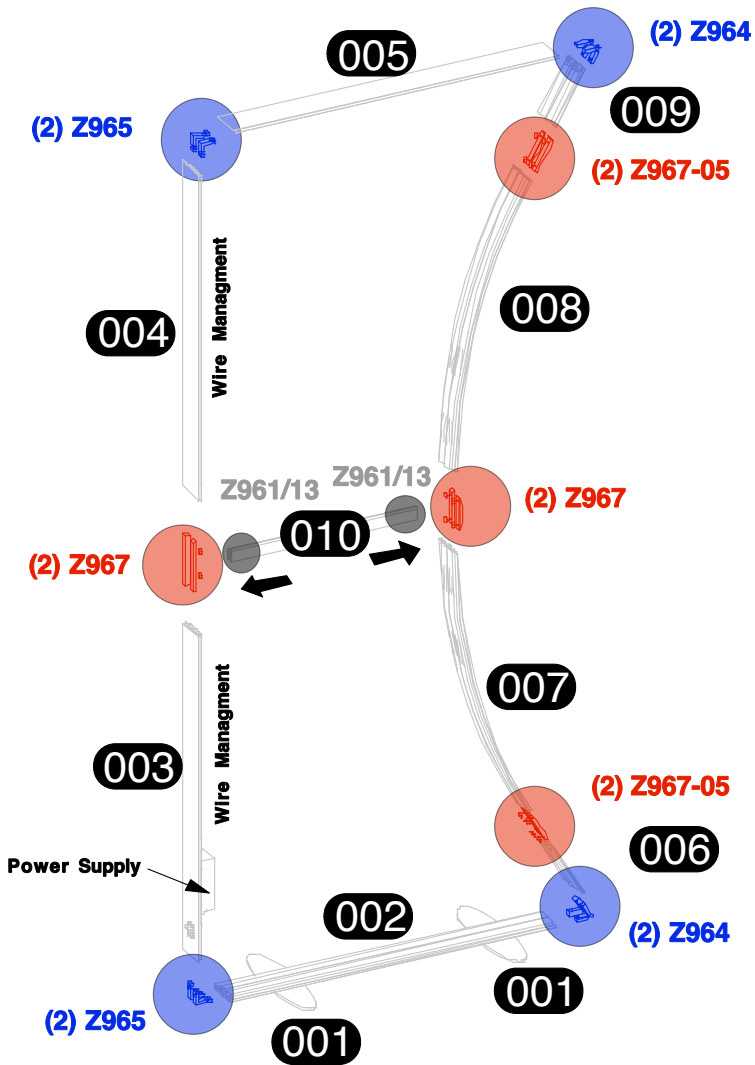

Profile	Label	#	Description
	001	2	1/4" ALUMINIUM OVAL BASE PLATE 17.5" (444.5MM) x 4.72" (120MM)
	002	1	M1901 36" (914.4MM) EXTRUSION W/ 45°&30° & (4) HOLES FOR BASE PLATE & LIGHTS
	003	1	M1901 47.5" (1206.5MM) EXTRUSION W/ (1) 45° CUT, PLASTIC EXTR. & POWER SUPPLY
	004	1	M1901 47.5" (1206.5MM) EXTRUSION W/ (1) 45° CUT, PLASTIC EXTR
	005	1	M1901 36" (914.4MM) EXTRUSION W/ 45°&30° & LIGHTS
	006	1	M1901 8.66" (200MM) EXTRUSION W/ (1) 30° CUT
	007	1	M1901 80" (2032MM) RADIUS CURVED EXTRUSION
	008	1	M1901 80" (2032MM) RADIUS CURVED EXTRUSION
	009	1	M1901 8.66" (200MM) EXTRUSION W/ (1) 30° CUT
	010	1	Z4400 19.69" (500.0MM) EXTRUSION W/ (2) TENSION LOCK
		4	Z966 90° CORNER INTERNAL CONNECTOR
		4	Z964 ADJUSTABLE ANGLE CORNER INTERNAL CONNECTOR
		7	Z967 STRAIGHT INTERNAL CONNECTOR
		6	Z967-05 STRAIGHT INTERNAL CONNECTOR FOR CURVED EXTRUSION
		4	5/16-18 FLAT HEAD SCREW 0.75" LONG FOR BASE PLATES
		2	36"W (914.4MM) x 95"H (2413MM) DYESUB GRAPHIC W/ SEG WELT ALL 4 SIDES

Bottom view

Loosen the screws on base plate but do not remove them. Then swivel base plates.

Bottom view

Tighten both screw firmly.

Z965 - Corner Connector
Z964 - Adjustable Connector

Connect frame extrusions together, as shown, using Torx tool (included). Do not overtighten.

NOTE: Remove corner connectors from extrusions before packing

Z967 - Straight Connector
Z967-05 - Straight Connector for Curved Extrusion

Connect frame spliced extrusions together, as shown, using Torx tool (included). Do not overtighten.

NOTE: Remove connectors from beams before packing


Z961/13 - Tension Lock

Place tension lock into groove. Insert Torx 30 wrench and turn 1/2 turn

Tension Lock

Torx Tool


GRAPHIC

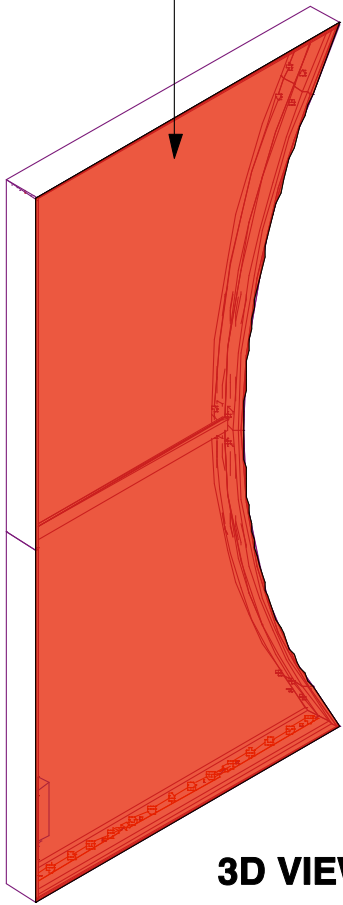

3D VIEW

GRAPHIC

Extrusion fabric groove

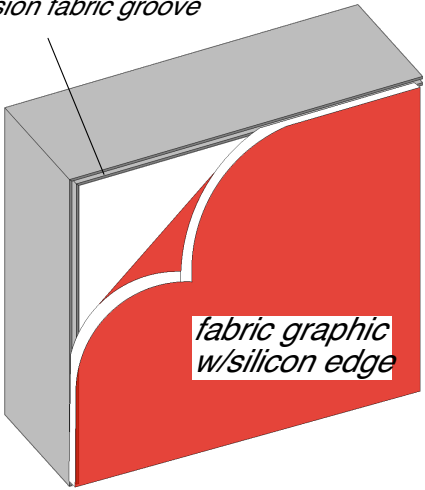


fabric graphic
w/silicon edge

Insert the silicon edge of the fabric into the groove of the extrusions.

Start on the corners, then centers and work your way to corners from center on both directions.


To pull fabric graphic out of extrusion groove use pull tab on corner.

WALL ASSEMBLY (OPTIONAL)

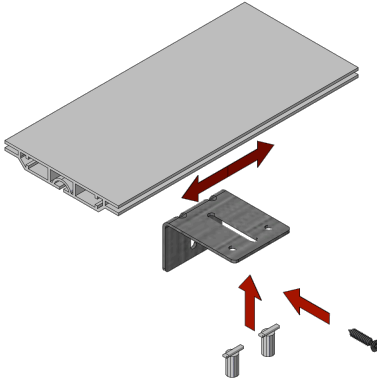



Attach wall bracket to top extrusion groove with provided hammerhead screws. Locate position of wall bracket on extrusion (preferably by wood stud) by sliding the bracket on the extrusion and tighten it. Secure the frame to the wall with provided wood screw.

PACKING DIAGRAM

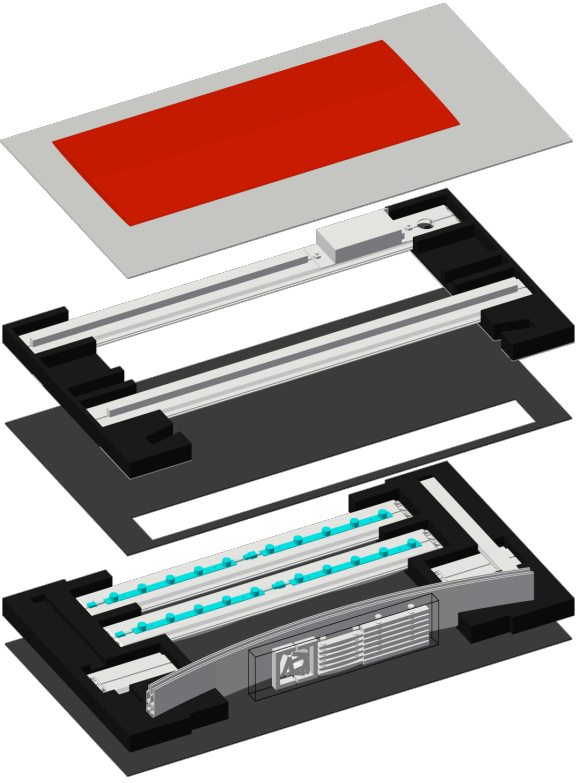

NOTE:
DO NOT DISCARD
ANY PACKING
MATERIAL.
LEVELS OF PARTS
MAY BE
SEPARATED BY
WHITE SHEETS OF
PLASTIC,
COROPLAST OR
CARDBOARD.

LIGHTS DETAILS

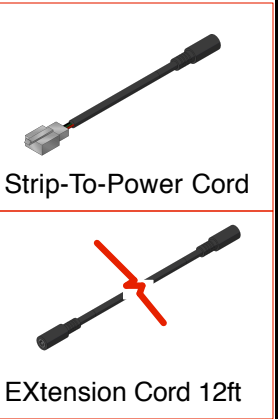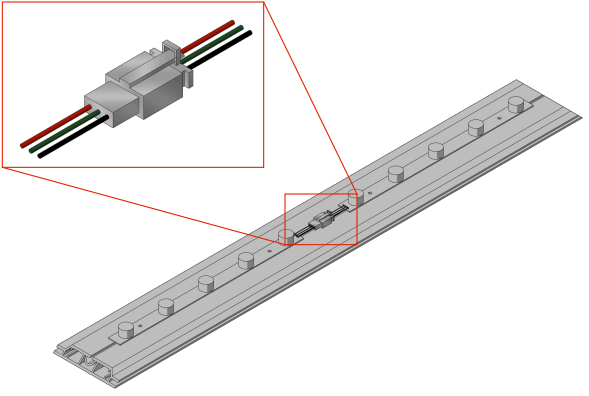

Strip-To-Power Cord

EXTension Cord 12ft

Lights come attached to extrusions. Ensure all lighting strips are connected. Once frame is assembled, connect strip-to-power cords to the end of top and bottom lights chain.
- For bottom lights connect strip-to-power cord to power supply directly.
- For top lights connect extension cord to strip-to-power cord and run with wire management extrusion then connect to power supply.
Run AC power cord out through grommet hole on vertical upright and connect to power outlet.
To remove or re-attach light strips use provided thumbscrews with plate.

