


ELITE GRAPHIC WALL fabric display

ELITE GRAPHIC WALL is constructed of aluminum extrusion and features SEG press fit fabric graphics for hassle free set up. Heavy duty aluminum feet ensure maximum stability. Graphics are printed on premium fabric for vibrant colors. The entire unit disassembles and packs flat in a single rotomolded case for unparalleled protection.

MODEL #: EGW-46



Details

- 1.5" Low-profile aluminum extrusion frame
- Single or double-sided SEG press fit dye-sublimated fabric graphics
- Easy assembly
- Packs in a single rotomolded flat transport case
- Limited Lifetime Warranty
- Made in the USA


Includes

- 4' x 6' Elite Frame
- Elite Stabilizer Feet
- SEG Front Fabric Graphic
- Elite Tool Kit
- Rotomolded Case

Dimensions

Assembled unit:
47.5"w x 72.25"h x 17.5"d
1206mm x 1835mm x 444mm
30 lbs / 13.6 kgS


Graphic area:
47"w x 71.5"h
1194mm x 1816mm

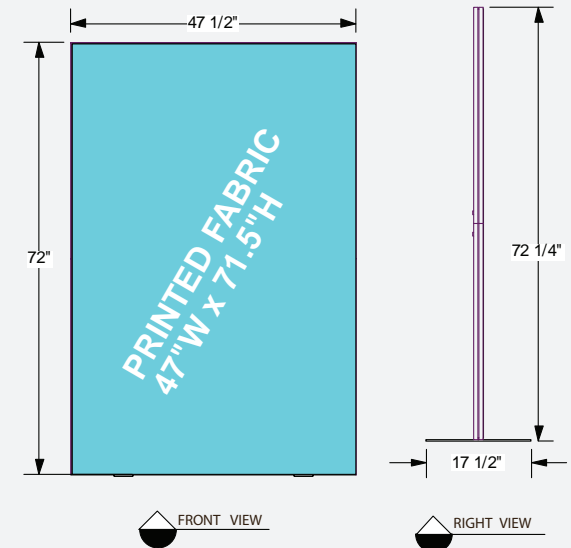

Additional information







Set-Up Time: 25-30min
Lead Time: 10 Days
Warranty: Limited Lifetime Warranty

Shipping




Packs in (1) L-8R1851-01 case
Shipping dimensions:
51"h x 18"w x 3"d
1295mm x 457mm x 76mm
45 lbs / 20.4 kgS

EGW-46 PACKAGE CONTENTS

Profile	Label	#	Description
	001	2	1/4" ALUMINIUM OVAL BASE PLATE 17.5" (444.5MM) x 3.15" (80MM)
	002	1	M1307 36" (914.4MM) EXTRUSIONS W/ (2) 45° CUTS & (2) HOLES FOR BASE PLATE
	003	2	M1307 47.5" (1206.5MM) EXTRUSIONS W/ (2) 45° CUTS
	004	2	M1307 36" (914.4MM) EXTRUSIONS W/ (2) 45° CUTS
		4	Z966 90° CORNER INTERNAL CONNECTOR
		2	5/16-18 FLAT HEAD SCREW 2.25" LONG W/ WASHER & WING NUT
		1	35.5"W (908MM) x 47"H (1194MM) SINGLE SIDED DYESUB GRAPHIC W/ SEG WELT ALL 4 SIDES


2.



Secure base plate to bottom horizontal extrusions with provided bolt and wing nut

3. GRAPHIC

Insert the silicon edge of the fabric into the groove of the extrusions.



Start on the corners, then centers and work your way to corners from center on both directions.

To pull fabric graphic out of extrusion groove, use pull tab on corner


4. LIGHT ASSEMBLY (Optional)





Slide light clip into the light. Then place the light into the groove and gently lower it down

5. WALL MOUNT (Optional)


Attach wall bracket to top extrusion groove with provided hammerhead screw. Locate position of wall bracket on extrusion (preferably by wood stud) by sliding the bracket on the extrusion and tighten it. Secure the frame to the wall with provided wood screw.




PACKING DIAGRAM



1.

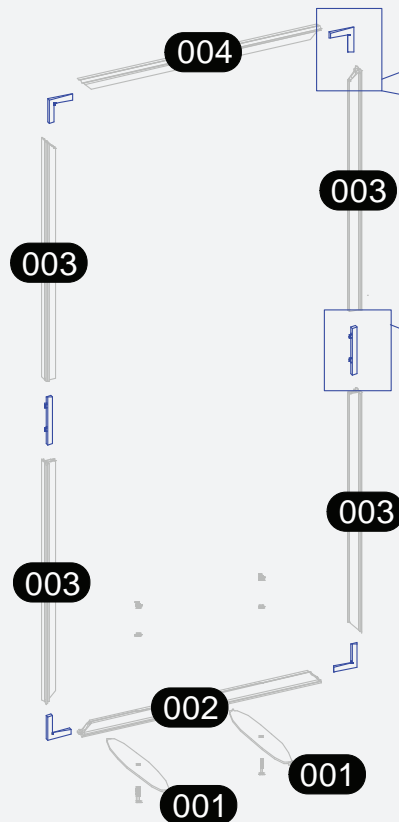


Connect frame extrusions together, as shown, using Torx tool (included). Do not overtighten.



NOTE: Remove corner connectors from extrusions before packing.

Connect frame spliced extrusions together, as shown, using Torx tool (included). Do not overtighten.



NOTE: Remove connectors from extrusions before packing

1. Slide straight connector (Z967) into inner channel of extrusion. Turn screw enough to hold connector in place.
2. Take another extrusion and slide onto straight connector. Tighten both screws to connect extrusions together.
3. Repeat above steps to connect all spliced extrusions together.
4. Slide corner connector (Z966) into both sides of horizontal extrusions. Turn each screw enough to hold connector in place.
6. Slide vertical extrusions onto corner connectors of top horizontal extrusion. Turn each screw enough to hold connector in place.
7. Finish frame assembly by sliding corner connectors of bottom horizontal extrusion into inner channel of vertical extrusions and tighten the screws to secure frame extrusions together.



10x8



8x8



6x8



6x6



4x8



4x6



4x4



3x8



3x6



3x4



3x3