
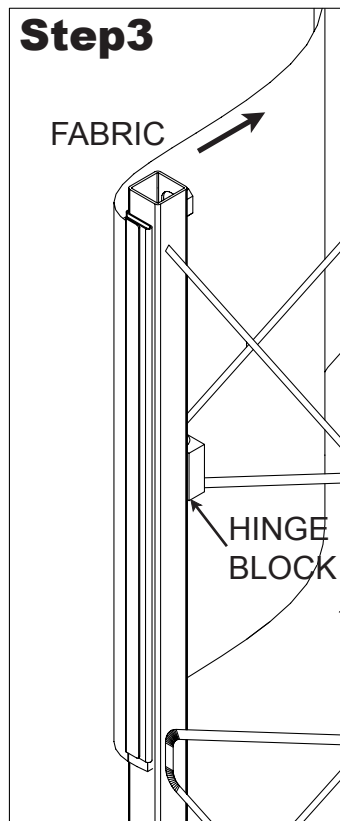
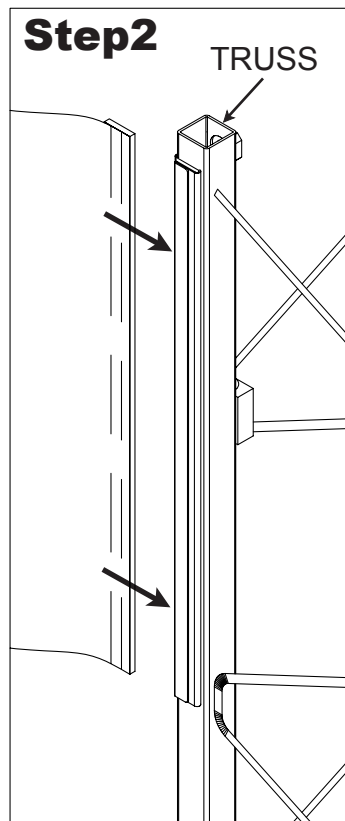


Fabric Clip (SAU11 & SAU12) Connection

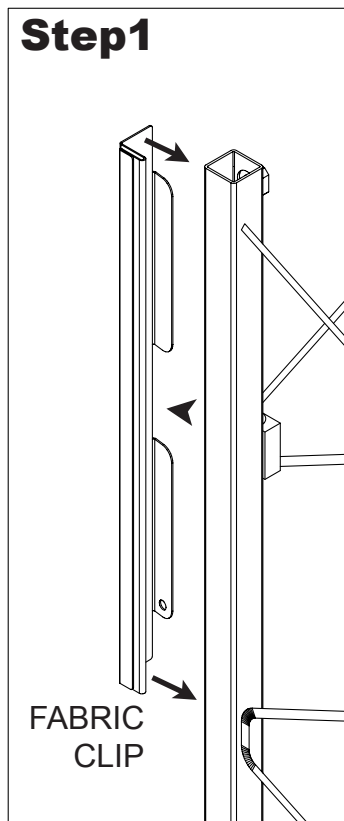

Step1

Snap the **Fabric Clip** onto the **Truss** at the desired location.

Note: that the gap in the **Fabric Clip** is meant to go around **Hinge Block** on the **Truss**. □

Step2

Slide the magnetic edge of the **Fabric** into the **Fabric clip**. The magnet will lock the fabric into position. □



Step3

Then pull the **Fabric** moderately taught at a 90 degree angle to the magnet.

Fabric Graphic Panel & Magnet Notes:

1. Fabric Panel should be 1" larger than inside or outside dimensions of the truss (1/2" each side) depending on which orientation used (see details below). □
2. Critical! Text or image should be 2 1/2" away from the edge of the panel or it may get cut off. □
3. Poplin is the recommend fabric since it has some stretch. □
4. Photo Fabric is the recommended print process. □
5. The Magnet size should be 1/2" x 1/16".
6. Recommended attachment of the Magnet is sewing it to the fabric.

IMPORTANT: ALL NOTES ARE RECOMMENDATIONS AND DO NOT ACCOUNT FOR VARIANCES IN THE FABRIC AND PRODUCTION OF THE GRAPHICS.

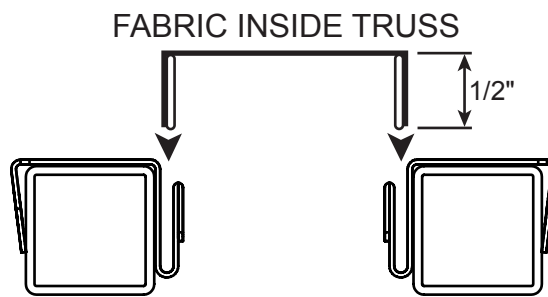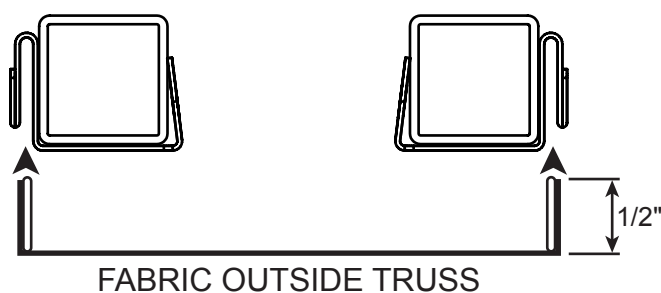

41085

01/24/03



Member

7316 Aspen Lane North
Minneapolis MN 55428-1109

e mail: info@interlockstructures.com
web: www.interlockstructures.com

INTERLOCK
Interlock Structures International, Inc.

voice: 763.425.1464
800.468.1497
fax: 763.425.8205