


COLORGLO™ RGB LED LIGHT STRIPS INSTALLATION GUIDE



INTERIOR DRY LOCATION INSTALLATION


ColorGlo RGB light strips are typically mounted in ColorGlo polycarbonate tubing for installation in interior dry locations. End caps are recommended to prevent dust or other contamination that could effect the performance and lifespan of the LED strips. Mounting clips hold tubing secure while allowing for 360 degree rotation. Mounting clips are recommended at 1 ft. spacings.

Variations in environmental conditions may cause typical expansion and contraction of polycarbonate tubing. Installation of lengths exceeding 4 ft. must account for these factors.

See *IntelliGlo Controller Installation Guides* for power/control interface and install detail.

Maximum of 12.5 ft. of ColorGlo RGB light strips may be installed per each power cable run.

See *ColorGlo RGB LED Light Strip data sheet* for LED specification detail.

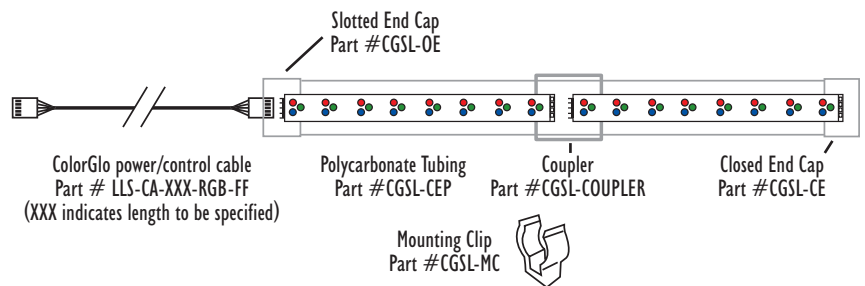

EXTERIOR WET LOCATION INSTALLATION

ColorGlo RGB light strips may be mounted and sealed in ColorGlo polycarbonate tubing for use in wet locations. Polycarbonate accessories are permanently sealed onto the tubing using adhesive part #TSE399-CI00G. Mounting clips hold tubing secure while allowing for 360 degree rotation. Mounting clips are recommended at 1 ft. spacings. A water tight end cap with a rubber grommet, when properly mounted on tubing using silicon adhesive, seals the cable and connector.



Variations in environmental conditions may cause typical expansion and contraction of polycarbonate tubing. Installation of lengths exceeding 4 ft. must account for these factors.

See *IntelliGlo Controller Installation Guides* for power/control interface and install detail.

Maximum of 12.5 ft. of ColorGlo RGB light strips may be installed per each power cable run.

NOTE: For wet location installation, use GE adhesive (part # TSE399-CI00G) on polycarbonate end caps and coupler sleeves.

See *ColorGlo Monochromatic LED Light Strip data sheet* for LED specification detail.

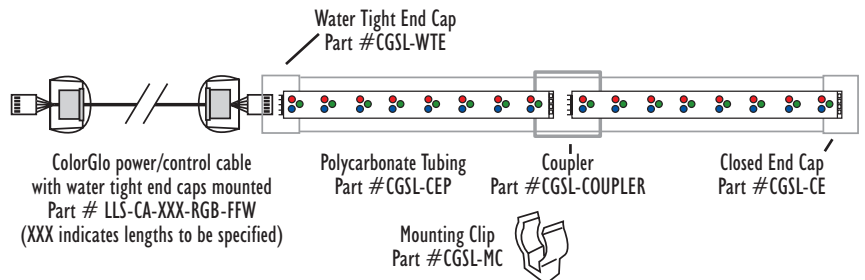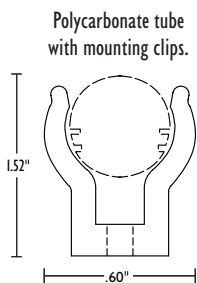

Rev. 050506

35 Hammond
Irvine, CA 92618 USA
800.735.4553 • 949.455.4460
Fax: 949.455.4474
www.colorgloledlighting.com

Manufactured by:



J&J ELECTRONICS, INC.